

Standard Operating Procedure


How to wrap the perfect pallet in 3 steps

Using the **GRIP** film dispenser





STEP 1

Wrap 3 times around the bottom of the pallet, with the skid plate flat to the floor.

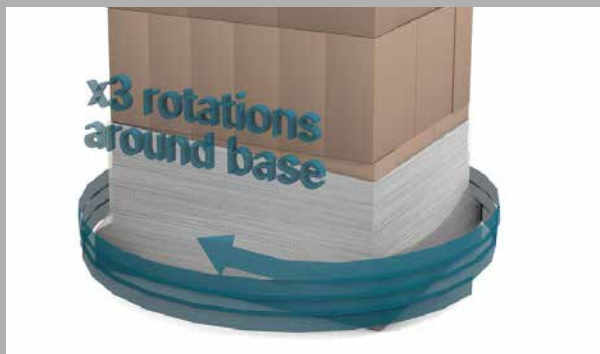


STEP 2

Rotate around the pallet moving upwards, with 100mm overlap as you go.

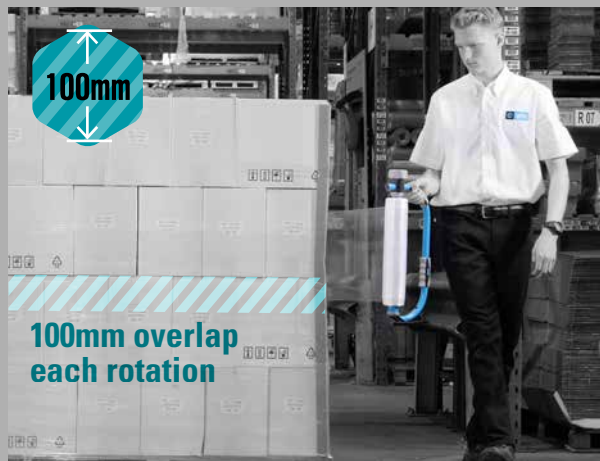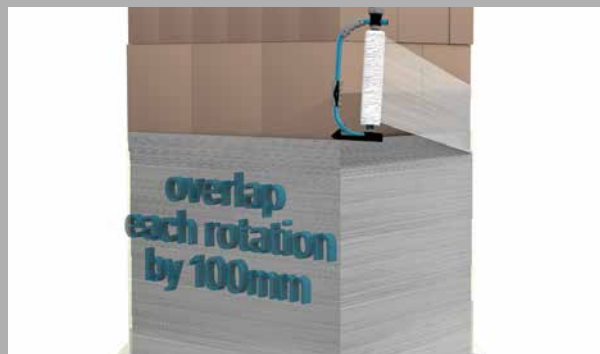

STEP 3

Lastly, wrap 3 rotations around the top in order to fully secure the load.

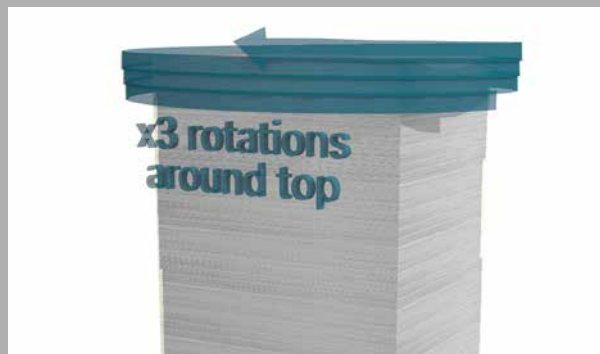



HEALTH & SAFETY INFORMATION



SYSTEMS
grip[®]

Improved ergonomics relieves stress on lower back and speeds up the wrapping process.

The unique design and application process when using GRIP[®] means you are always aware of your surroundings and potential hazards.

The lightweight construction of GRIP[®] makes it easy to maintain film tension - even when working at height.

The GRIP[®] robust skid plate allows you the flexibility to easily add extra load support.

With GRIP[®]



Without GRIP[®]

